





Computerized Displays Touch Screen Directories

TOUCH SCREEN DIRECTORY SYSTEM



THRU-WALL

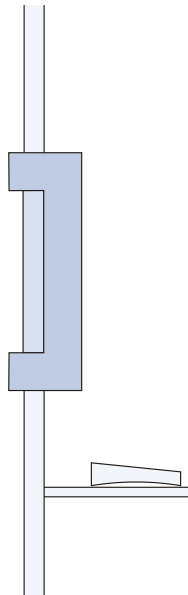

KIOSK

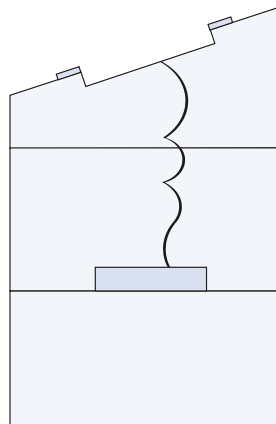

SAMPLE SCREENS



SPECIFICATIONS

Banner Touch 15 - Open

-LCD Display
-Touchscreen

-Bezel (optional)

-Display Size

-Pixel Pitch
-MAX Resolution

-Contrast Ratio

-Brightness

-Response Time

-Display Color

-Viewing Angle

-L/R

-U/D

-PC Interface

-Video:

-Sync:

-Display Mode

-VGA

-VGA

-VGA

-SVGA

-XGA

-MAC

15.1" TFT active matrix panel
Analog Resistive or Capacitive

Pictured above

304(H) x 228(V) mm

.297(H) x .297(V) mm
XGA 1024 x 768

350:1 (max)/ 200:1 (min)

250 cd/m2 (max) 200cd/m2 (min)

30 ms (min)/ 50 ms(max)

16M

+70 ~-70

+70 ~-50

RGB analog 0.7V peak to peak

TTL positive or negative

640 x 350 (70Hz)

720 x 400 (70Hz)

640 x 480 (60/72/75Hz)

800 x 600 (56/60/72/75Hz)

1024 x 768 (60/70/75Hz)

832 x 624 (75Hz)

Banner Touch 15 - Open

-Side Control: Power on/off w/LED,
Menu/Select (up, down), Adjustment(+,-)

-OSD: Brightness, Contrast, Clock, Phase, Auto-tune, Recall, H-position, V-position, R.G.B. Color drive, Audio volume

-Plug & Play: DDC 1/2B compatible

-Video-In (optional): S & RCA connector

-Touchscreen connector: Rs232 (NTSC/PAL)
Auto-detect

-Speaker (optional): 1W/per channel driver

-Power: Embedded AC input power system,
universal 100-245 Volts

-Operating Conditions

-Temperature: 5 ~ 35 C (41 ~ 95 F)

-Humidity: 20% ~ 80% (no condensation)

-Altitude: to 10,000 feet

-Storage Conditions

-Temperature: 20 ~ 60 C (-4 ~ 140 F)

-Humidity: 10% ~ 90% (no condensation)

-Dimensions (mm)

-Open Frame: 400.6(H) x 311(W) x 57(D)

-Panel Mount: 402.6(H) x 313(W) x 66.7(D)

-Weight

-Open Frame: 4.8Kg

-Panel Mount: 5.3Kg

INTERIOR
FACILITY

TOUCH SCREEN
DIRECTORY
SYSTEM

Interior Facility

800-4-ANY-SIGN.com

"Call or Click"

Industrial Design/ Engineering/ Marketing/ Signs/ Displays/ Exhibits/ Visual Solutions